


# GM LOGGER

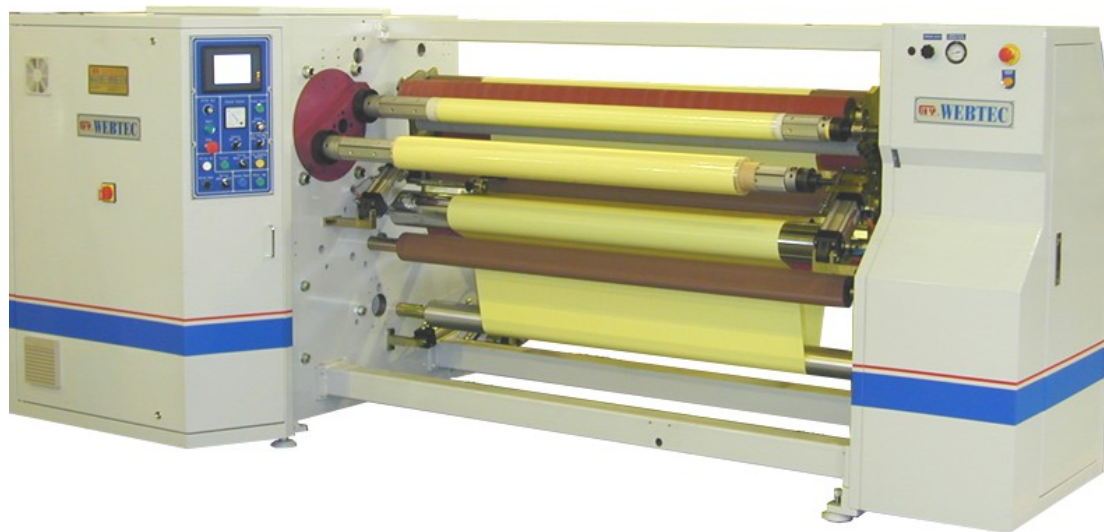

**Application :** 2 shafts auto exchange, suitable for rewinding various self-adhesive tapes.

**Specification :** Machine Width : 1.0M/1.3M/1.6M                      Max. Unwind O.D : 800mm  
Machine Speed : 120M / Min                      Max. Rewind O.D : 300mm  
Rewind Core I.D : 77mm (38mm core is only available on 1.3M unit)

**Feature :**

1. Equipped with the connected unwind base, which is convenience on operation and space saving.
2. Equipped auto tension controller and surface type lay on roller on unwind base to make web wound out smoothly.
3. Driven by 2 A.C motors, 1 for web feeding, 1 for rewind tension control which automatically increasing toque on the rewind shaft when the finished roll O.D is getting bigger.
4. Center type winding with surface pressure roller able to rewind various materials on different requests.
5. The air for the rewind shafts will be automatically filled and leaked in the production.
6. All functions are operated under LCD touch panel control, which is operator friendly and easy for data setting.
7. Central control system is as PLC unit and all of electrical devices are compliant to the latest European CE regulation for safety operation.

**Optional Parts :**

1. Unwind Pick-Up Lift : For loading jumbo roll on the machine quickly and time saving.
2. Tabbing Device : Automatic tabbing on the web during the production.
3. Noise Reduction Hood : For attenuating the production sound when the machine is running.
4. Slitting Device : Able to be equipped with air score knife and trim removable unit for trimming at both sides and wide size slitting.



Adress  
Phone  
Fax  
Email  
Website

De Hoogjens 48 4254 XW Sleenwijk  
+31 (0)183 – 600810  
+31 (0)183 – 600753 Email  
[info@ehw-elektro.nl](mailto:info@ehw-elektro.nl)  
[www.ehw-elektro.nl](http://www.ehw-elektro.nl)