
## FJ LOG ROLL CUTTER

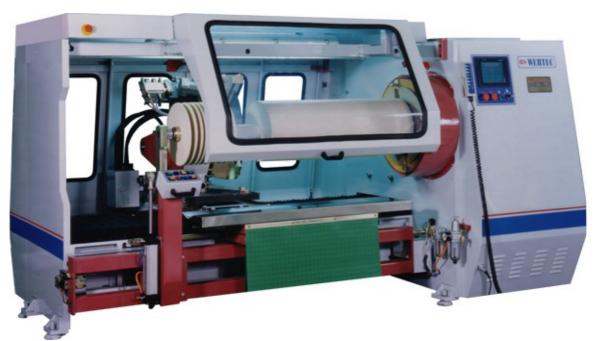

**Application:** Suitable for cutting masking, double side, foam & cloth tapes.

**Specification:** Machine Width: 1.0/1.3/1.6M Max. Cutting O.D: 450mm

Cutting Core I.D: 77mm (3") Min. Cutting Width: 3mm

## Feature:

- 1. Cutting shaft and circular blade are driven by A.C motor with inverter control, which is able to set RPM and running direction obverse/reserve on different requests.
- 2. Width setting is controlled by servo motor with ball screw and guide rails to make accuracy movement.
- 3. All functions are operated under LCD touch panel control, which is operator friendly and easy for data setting.
- 4. Central control system is as PLC unit, all of electrical devices are compliant to the latest European CE regulation for safety operation.
- 5. Knife feeding is controlled by servo motor, the cutting speed is adjustable in 3 stages.
- 6. Equipped with knife angle auto adjustment by servo motor control, cutting angle can be changed from -9 to +9 degree automatically for making roll surface smoothly.
- 7. Equipped with internal/external chuck, which is suitable to clamp big/small log rolls, and the cutting shaft end supporter is also adjustable for this purpose.
- 8. Connected safety cover to protect operator during the production, which is compliant to the CE regulation.
- 9. On maintenance, the machine can be communicated with our computer by telecom line for instant check & service.

## **Optional Parts:**

1. Air Type Cutting Shaft: To improve the cutting accuracy when the tolerance of paper core I.D is too big.

2. Loading Device : Connected type log roll loading lift table is convenience to put heavy roll into the shaft.

3. Sharpening Device: Grinding knife on the machine to save time for taking blade off.



Adress Phone Fax Email Website De Hoogjens 48 4254 XW Sleeuwijk +31 (0)183 – 600810 +31 (0)183 – 600753 Email info@ehw-elektro.nl www.ehw-elektro.nl